





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31180039 ~042	2011/08/12	Jiang Jun Hua	Change Drawings
C	LE315C0376-379	2015/12/10	Ruru	Change Logo & Tolerance & Ball-marker

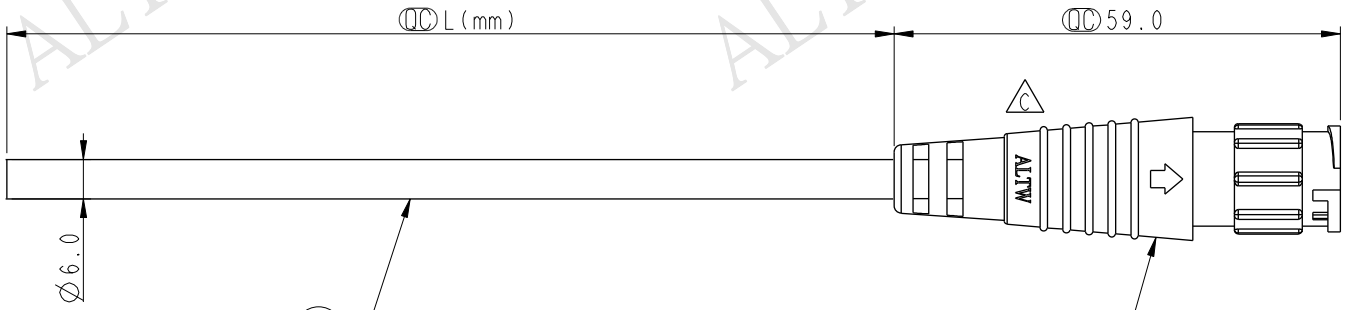


△C BU-10AMMM-LL6000
Color: Black

△B BU-10AMMM-LL6AXX

XX: 01~99Meter
01: 01Meter
02: 02Meters
:
:
99: 99Meters

Cable Length(L): 01~99Meters



PIN ASSIGNMENTS
Front View 前視圖

Orange	橙	10
Black	黑	9
Red	紅	8
Pink	粉紅	7
Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.
Pin Out		

Note:

- * Ⓞ Important Dimension To Check.
- * Waterproof Rate: IP66
- △B* Housing: Nylon+GF, Black
- △B* Pin: Copper Alloy, Gold Plated
- △B* Cable: UL2464 26AWG*10C+Drain+Al/My, PVC Jacket UV Resistant, OD=6.0, Black
- △B* Cable Length Tolerance:
 - 01M: ±40mm
 - 02M~05M: ±60mm
 - 06M~10M: ±100mm
 - 11M~30M: ±200mm
 - 31M~99M: ±500mm

UNIT:mm	
TOLERANCE	± 0.5mm △C

TITLE	△B Color:Black CABLE LOCK 10PIN M CONN M PIN		
SCALE	1:1	SIZE	A4
REV.	C	WC-REV.	A.2
		QC	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRWN BY	DATE
	Ruru	2015-12-10
DWG NO	CHEKED BY	DATE
BU-10AMMM-LL6AXX	Rita	2015-12-10
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2015-12-10