




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720170~173	2017/02/10	Ruru	Change Logo & Outer Mold Design & Note


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

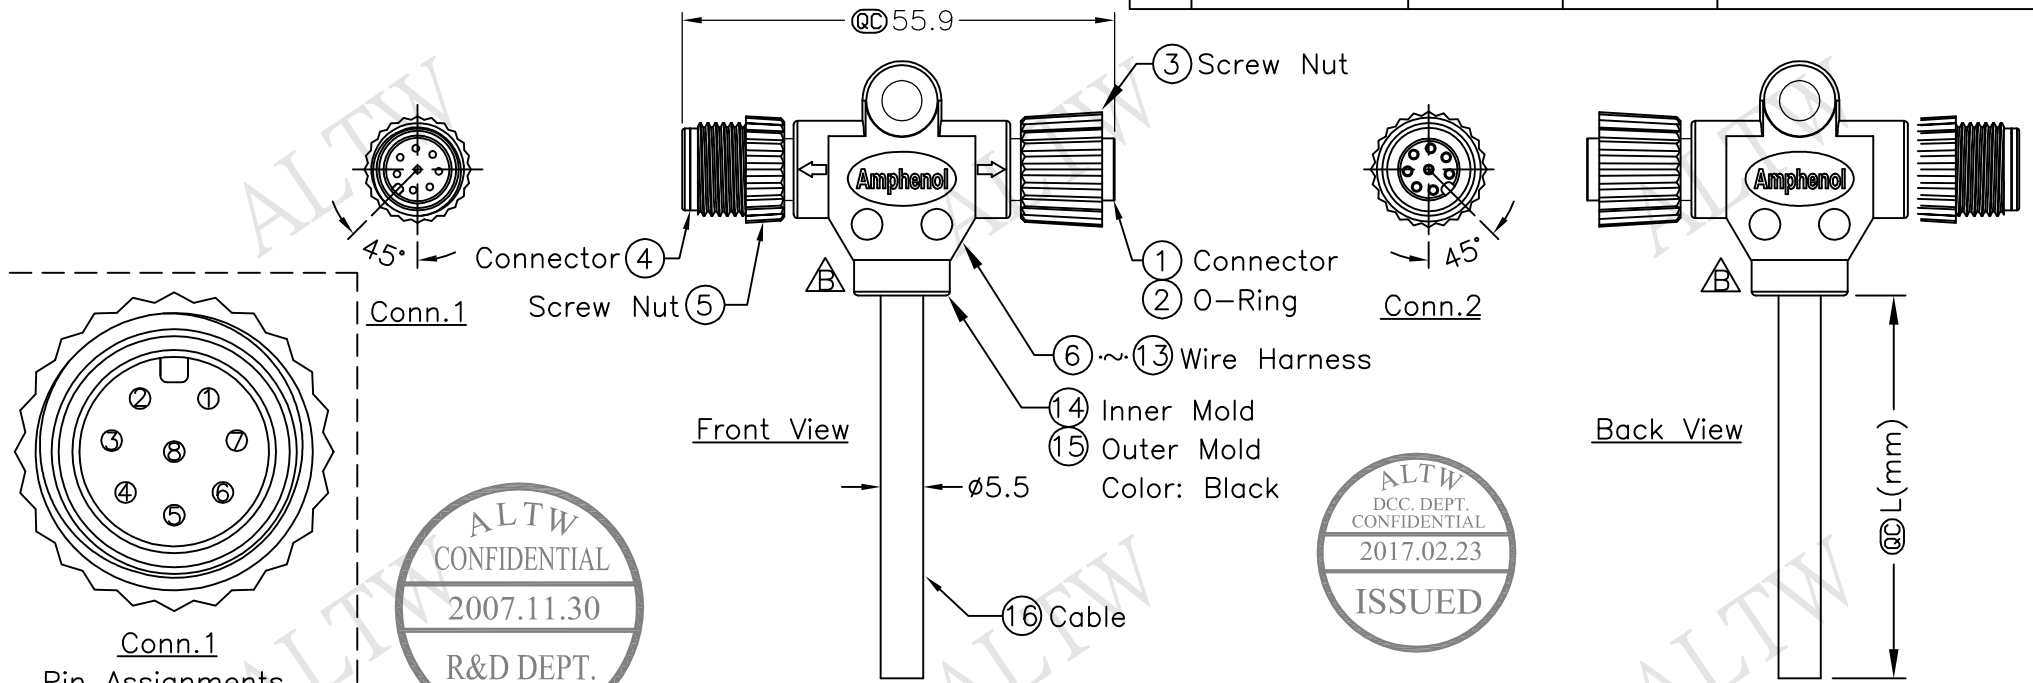

Conn.1  
Pin Assignments  
Front View



Conn.2  
Pin Assignments  
Front View



PS-080800-MF0-TSAXX

8	Gray	灰	8
7	Purple	紫	7
6	Blue	藍	6
5	Green	綠	5
4	Yellow	黃	4
3	Orange	橘	3
2	Red	紅	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

XX:01~99Meter  
01:01Meter  
02:02Meters  
:  
:  
99:99Meters

Cable Length(L):01~99Meters

Note:

- \* @C Important Dimension.
- \* Waterproof Rate: IP68
- \* Housing: Black, PU
- \* Male&Female Pin: Copper Alloy, Gold Plated
- \* Wire Harness: UL1007, 24AWG, 8Pcs.
- \* Cable: Black, UL2464 24AWG\*8C+Talc PVC Jacket (UV Resistant), OD=5.5mm
- \* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE M12 Conn T Cable Screw MF Conn MF Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
@C :Inspection Item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO PS-080800-MF0-TSAXX
CUSTOMER ALTW	

DRAWN BY Ruru	DATE 2017/02/10
CHECKED BY Rita	DATE 2017/02/10
APPROVED BY Max	DATE 2017/02/10