


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LENI440194	2014/05/10	Tom	Upated The Note
C	LENI490328	2014/09/06	Joyy	Change to 94V0 material
D	CI91686	2019/09/25	JC Chen	Dimensional tolerance change

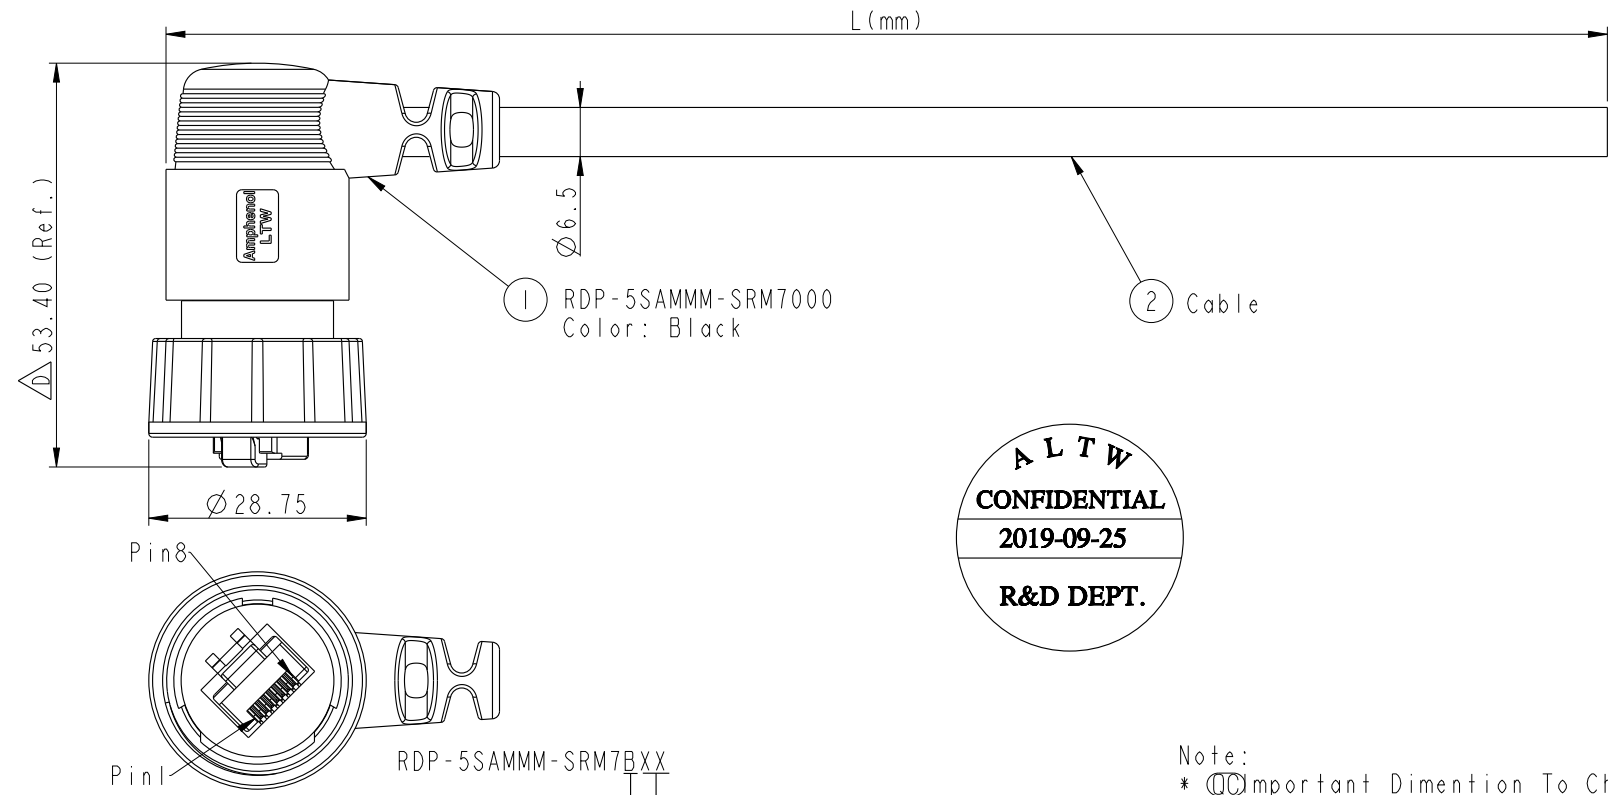

Drain Wire	接地	Shield	
Brown	棕	8	Twist 對絞
White/Brown	白/棕	7	
Green	綠	6	Twist 對絞
White/Blue	白/藍	5	
Blue	藍	4	Twist 對絞
White/Green	白/綠	3	
Orange	橘	2	Twist 對絞
White/Orange	白/橘	1	
Wire Color		Plug	

RDP-5SAMMM-SRM7BXX

XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 :
 :
 99: 99Meters
 Cable Length(L):01~99Meters

Note:
 * Important Dimention To Check.
 * Waterproof Rate:IP67
 * Plug: PC, Gold Plated
 * Screw Nut: Nylon+GF, Black
 * Gasket: Silicone, Gray
 * Cable: CAT5E FTP, OD:Ø6.5mm, Black
 * Cable Length Tolerance: 01M:±40mm
 02~05M:±60mm
 06~10M:±100mm
 11~30M:±200mm
 30~99M:±500mm

Pin Out	Wire Color	Shield
8	棕	Shield
7	白/棕	
6	綠	
5	白/藍	
4	藍	
3	白/綠	
2	橘	
1	白/橘	

UNIT:mm		TITLE	RJ D SIZE RIGHT ANGEL CABLE		
TOLERANCE	±0.5	SCALE	1:1	SIZE	A4
		REV.	D	WC-REV.	A.12
					Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	JC Chen	2019-09-25
DWG NO	CHECKED BY	DATE
RDP-5SAMMM-SRM7BXX	Li Feng	2019-09-25
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2019-09-25