
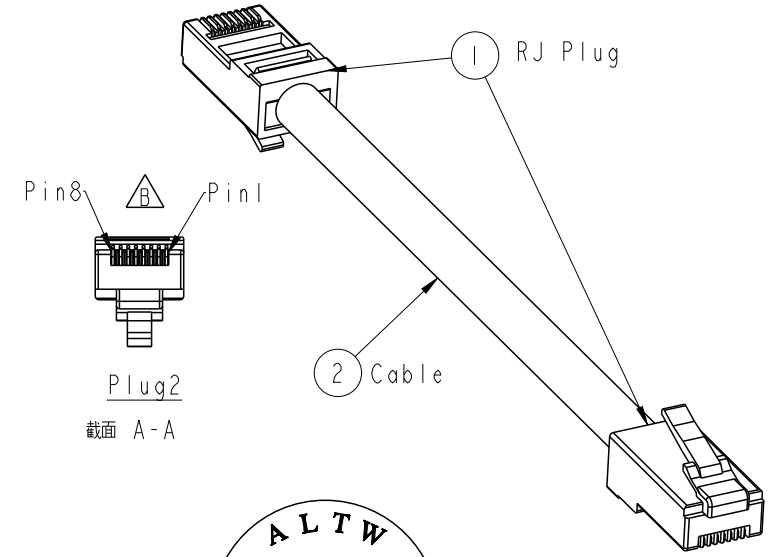


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1390358-359	2013-10-02	Raison	Modify Pin Out

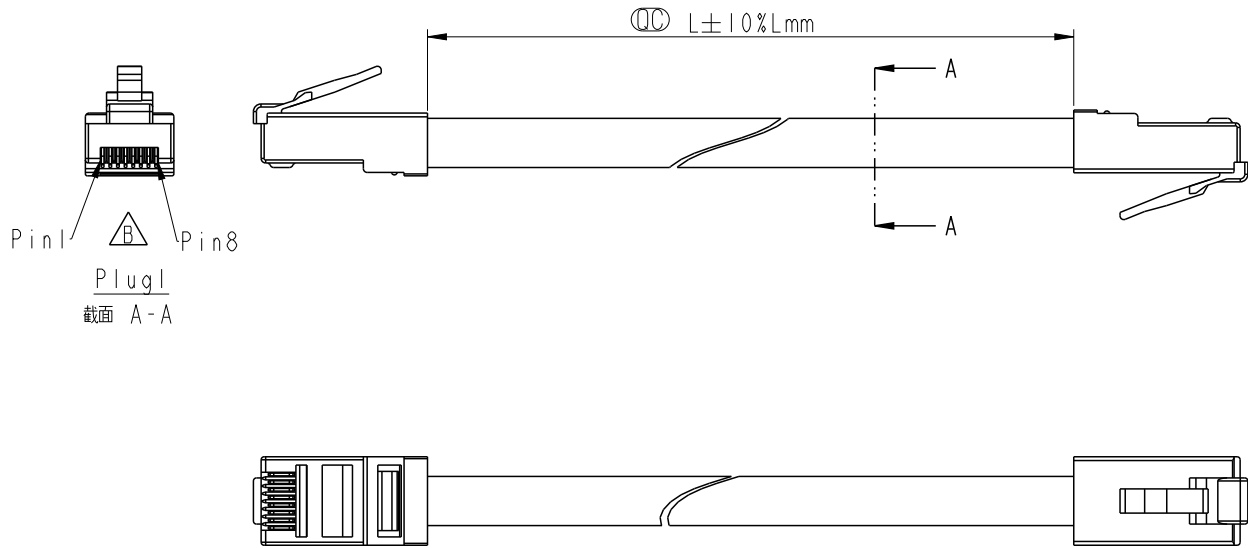

ALTW  
CONFIDENTIAL  
2013-10-02  
R&D DEPT.

ALTW  
DCC. DEPT.  
CONFIDENTIAL  
2013.10.15  
ISSUED

SPG06-SPG06-BXX

XX: 100~1000mm  
10: 100mm  
15: 150mm  
20: 200mm  
|  
95: 950mm  
A0: 1000mm  
Cable Length(L): 100~1000mm

Note:  
\*  $\varnothing$  Important Dimension To Check  
\* Plug: 8P8C RJ45 Shield Plug.  
\* Cable: CAT5E FTP 24#\*4P+D+AL/MY, 6.5  
\* Cable Length Tolerance:  $\pm 10\%Lmm$

Shield	Drain	接地線	Shield
8	Brown	棕	8
7	White/Brown	白/棕	7
6	Green	綠	6
5	White/Blue	白/藍	5
4	Blue	藍	4
3	White/Green	白/綠	3
2	Orange	橙	2
1	White/Orange	白/橙	1
Plug1	Wire Color		Plug2
	Pin Out		

UNIT: mm		TITLE CPLRJ05G006+WCA0664UV01	<b>Amphenol LTW</b> 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Raison_liao	DATE 2013-10-02
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 1:1	SIZE A4	SHEET 1 OF 1	REV. B	DWG NO SPG06-SPG06-BXX	CHECKED BY Tony	DATE 2013-10-02
		WC-REV. B.1	$\varnothing$ : Inspection item		CUSTOMER ALTW	APPROVED BY Victor	DATE 2013-10-02

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.