



5	6	7	8
REV.	ECN NO.	DATE	SIGN

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



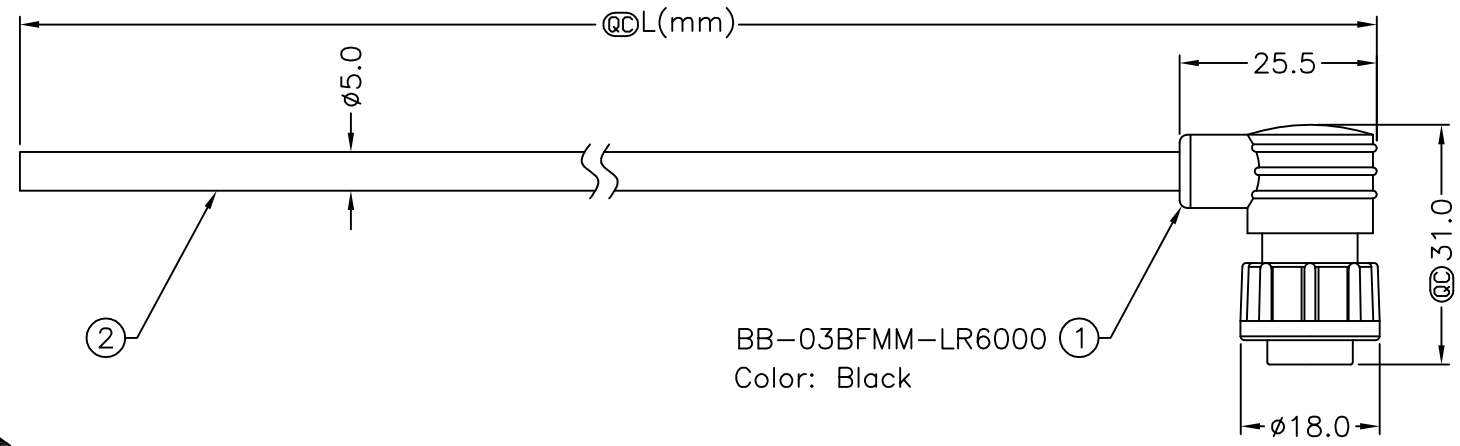


BB-03BFMM-LR6000 (1)  
Color: Black

BB-03BFMM-LR6AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters



Conn.



Pin Assignments  
Front View

3	Yellow
2	White
1	Black
Conn.	Wire Color
Pin Out	

Note:

- \* @C Important Dimension To Check.
- \* Waterproof Rate: IP66
- \* Housing: Black, Nylon+GF
- \* Pin: Copper Alloy, Gold Plated
- \* Cable: Black, UL2464 20AWG\*3C+Al/My  
PVC Jacket UV Resistant, OD=5.0mm
- \* Cable Length Tolerance:1M~10M±5%mm,11M~99M±500mm.

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Standard Cable Lock 3Pin F Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. A	SIZE A4 @C :Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO BB-03BFMM-LR6AXX
CUSTOMER ALTW	

DRAWN BY Raul Paulo Canja	CHECKED BY Ricky Valerio
APPROVED BY Win	

DATE 2007/01/25	DATE 2007/01/27	DATE 2007/01/27
--------------------	--------------------	--------------------