



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1190020~23	2011/08/18	Jiang Jun Hud	Change SR View
C	LEN1610116~19	2015/12/30	Ruru	Change Logo

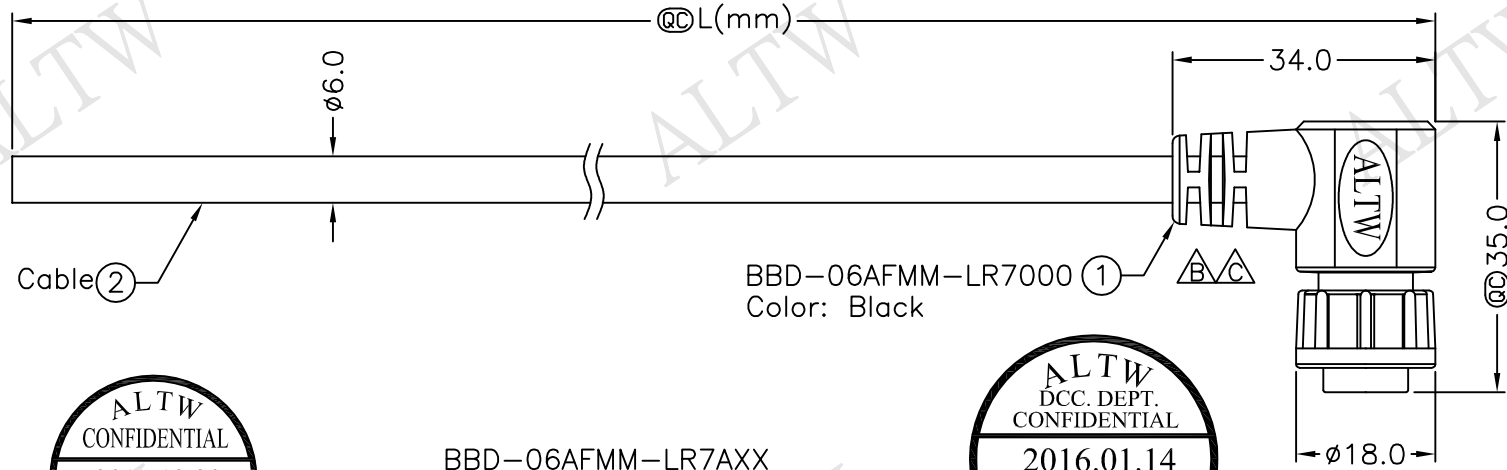

BBD-06AFMM-LR7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters

Cable Length(L):01~99Meters

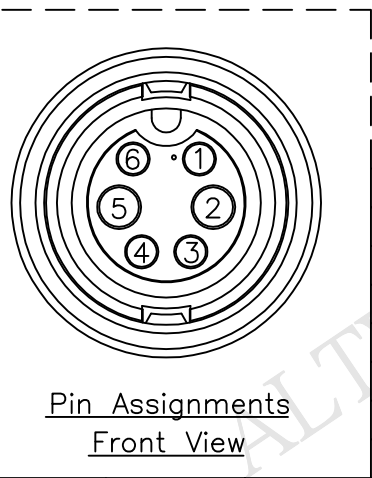

6	Gray (24AWG)	灰	△
5	Blue (20AWG)	藍	
4	Yellow (24AWG)	黃	
3	Green (24AWG)	綠	
2	Brown (20AWG)	棕	
1	White (24AWG)	白	
Conn.	Wire Color	Pin Out	

Note: Conn.
 * @@Important Dimension To Check.
 * Waterproof Rate: IP67
 * Housing: Black, Nylon+GF
 * Pin: Copper Alloy, Gold Plated
 * Cable: UL2464(20AWG*2C+24AWG*4C)+Drain+Al/My, Black, PVC Jacket UV Resistant, OD=6.0
 △* Cable Length Tolerance:01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
	Cable Lock 6Pin F Conn M Pin	
SCALE	Free	SHEET 1 OF 1
REV. C	SIZE A4	@@ :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2015/12/30
BBD-06AFMM-LR7AXX	Rita	2015/12/30
ALTW	Lisa	2015/12/30

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

A B C D E F

1 2 3 4 5 6 7 8