



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1190173~176	2011/08/24	Jiang Jun Hud	Change SR View
C	LEN1620080~083	2016/01/08	Ruru	Change Logo




BD-05AFMM-SR7AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 ...  
 99:99Meters  
 Cable Length(L):01~99Meters

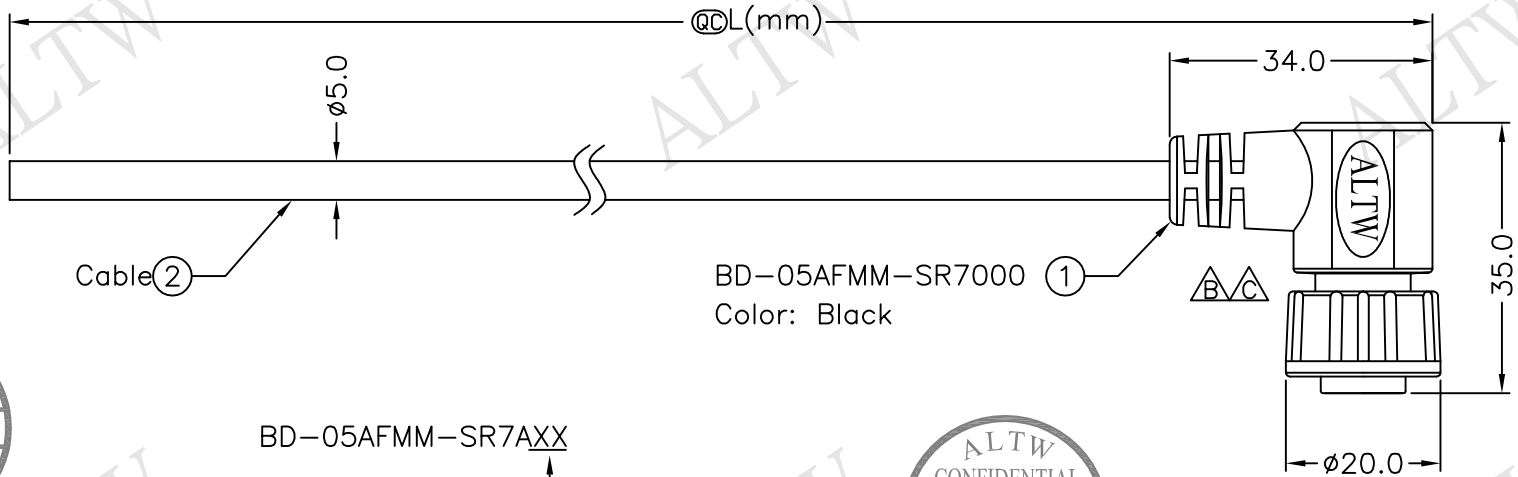

Conn.

- Note:
- \* @D Important Dimension To Check.
  - \* Waterproof Rate: IP67
  - \* Housing: Black, Nylon+GF
  - \* Pin: Copper Alloy, Gold Plated
  - \* Cable: Black,UL2464 24AWG\*5C+D +Al/My, (UV Resistant) OD=5.0
  - \* Cable Length Tolerance:01M:±40mm  
 02M~05M:±60mm  
 06M~10M:±100mm  
 11M~30M:±200mm  
 31M~99M:±500mm

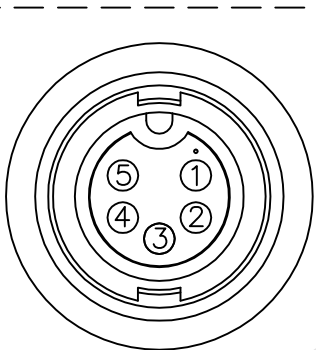

Pin Assignments  
Front View

Green 綠	5	△B
White 白	4	
Black 黑	3	
Blue 藍	2	
Brown 棕	1	
Wire Color	Conn.	
Pin Out		

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Standard, Cable Screw 5Pin F Conn M Pin		
SCALE Free	SHEET 1 OF 1	
REV. C	SIZE A4	QC :Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2016/01/08
DWG NO BD-05AFMM-SR7AXX	CHECKED BY Rita	DATE 2016/01/08
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/01/08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.