



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C		05/29/2008	Ivan	Modify the holes & change pin
D	LEN-8B0170~173	2008/09/25	Shin	Add Note
E	LEN1630491~494	2016/03/15	Ruru	Change Logo & Note


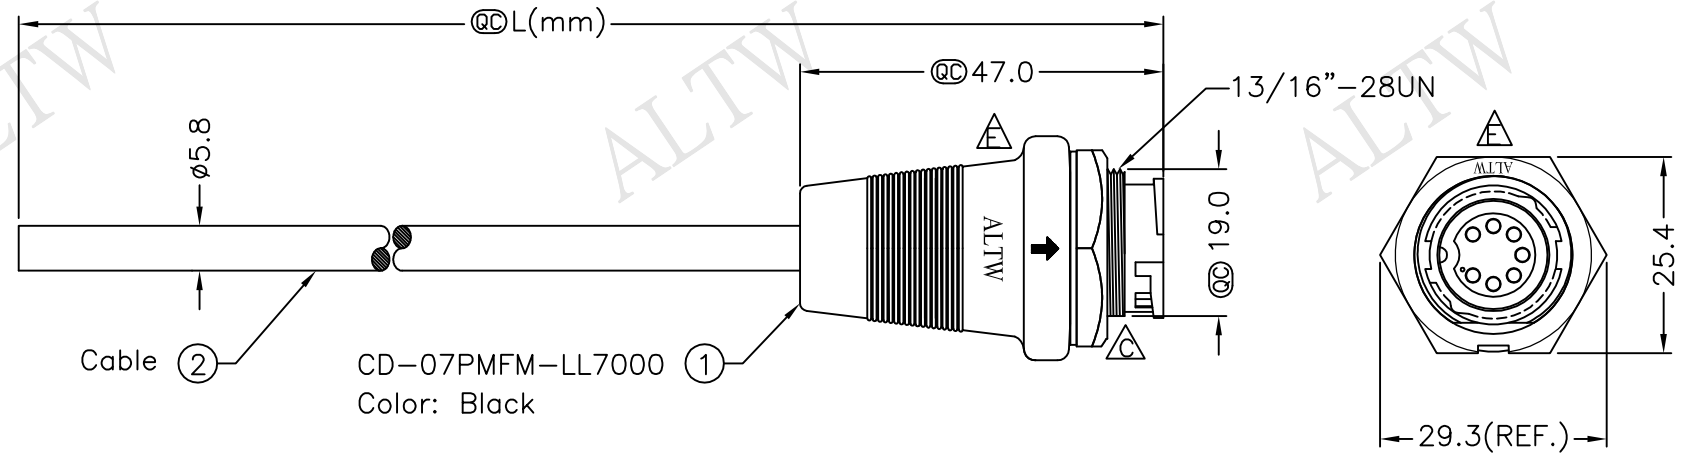


Cable ② CD-07PMFM-LL7000
Color: Black

CD-07PMFM-LL7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @Q Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF,Black
 - * Female Pin: Copper Alloy,Gold Plated
 - * Cable: UL2464 24AWG*7C+D+AL/My, PVC Jacket UV Resistant, OD=5.8, Black
 - * Use with waterproof cap or dust cap
Panel Thickness Max: 2.0mm
 - * Use without waterproof cap or dust cap
Panel Thickness Max: 3.0mm
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

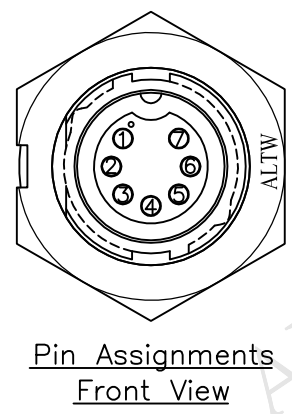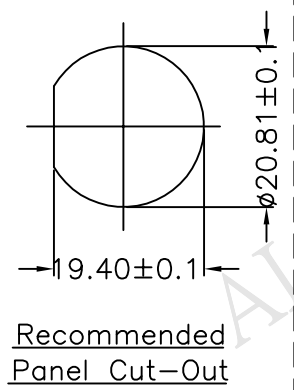

7	White	白	△
6	Green	綠	△
5	Brown	棕	△
4	Red	紅	△
3	Yellow	黃	△
2	Orange	橘	△
1	Blue	藍	△
Conn.	Wire Color		
	Pin Out		

UNIT:mm		TITLE	ITEM NO	DRAWN BY	DATE
TOLERANCE		Middle, Cable Lock 7Pin M Conn F Pin		Ruru	2016/03/15
±0.5 mm		SCALE Free SHEET 1 OF 1	DWG NO	CHECKED BY	DATE
		REV. E SIZE A4 @QC :Inspection Item	CD-07PMFM-LL7AXX	Rita	2016/03/15
			CUSTOMER	APPROVED BY	DATE
			ALTW	Lisa	2016/03/15

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.