



ALTW  
CONFIDENTIAL  
2016.01.14  
R&D DEPT.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN12B0072~075	2012/11/19	Yulong	Change IP67 To IP66, Add Cable Length Tolerance
C	LEN1610233~236	2016/01/14	Vicky	Update Logo & View

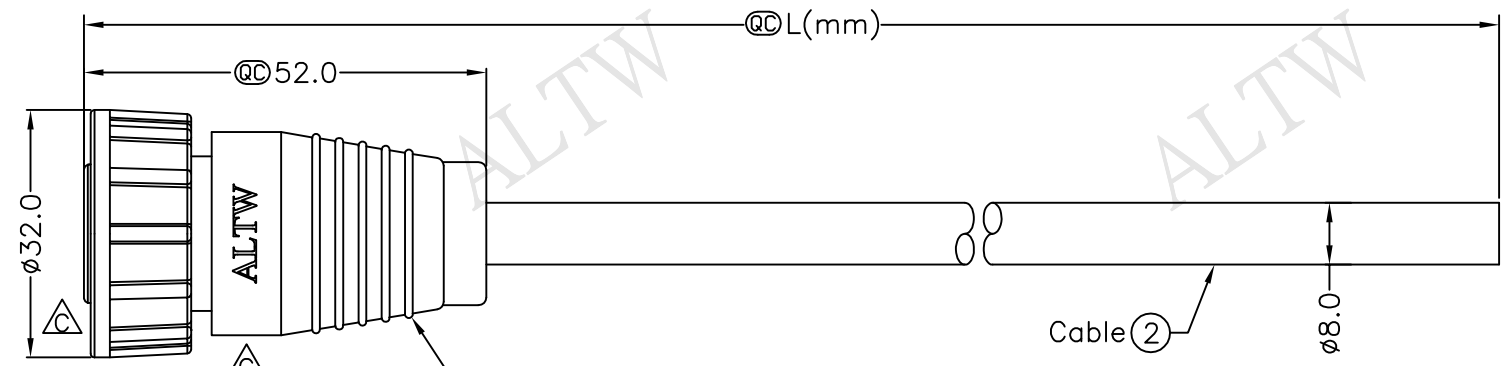

18	Blue/White	藍/白
17	Green/White	綠/白
16	Orange/White	橘/白
15	Red/White	紅/白
14	Brown/White	棕/白
13	Black/White	黑/白
12	Light Green	淺綠
11	Purple	紫
10	Orange	橘
9	Black	黑
8	Red	紅
7	Pink	粉
6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

ALTW  
DCC. DEPT.  
CONFIDENTIAL  
2016.01.19  
ISSUED



Pin Assignments  
Front View

① DD-18BFMM-SL6000  
Color: Black

DD-18BFMM-SL6AXX  
XX:01~99Meters  
01:01Meter  
02:02Meters  
⋮  
99:99Meters

- Note:
- \* @C Important Dimension To Check Cable Length(L):01~99Meters
  - \* Waterproof Rate: IP66
  - \* Housing: Nylon+GF, Black
  - \* Male Pin: Copper Alloy, Gold Plated
  - \* Screw Nut: Nylon+GF, Black
  - \* Cable: UL2464 24#18C+Drain+AL/My  
PVC Jacket UV Resistant, OD=8.0, Black
  - \* Cable Length Tolerance: 01M:±40mm  
02M~05M:±60mm  
06M~10M:±100mm  
11M~30M:±200mm  
31M~99M:±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Large Cable Screw 18Pin F Conn M Pin	
SCALE	Free	SHEET 1 OF 1
REV.	C	SIZE A4 @C :Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Vicky	2016/01/14
	Ruru	2016/01/14
	Lisa	2016/01/14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.