


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720285~288	2017/02/14	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

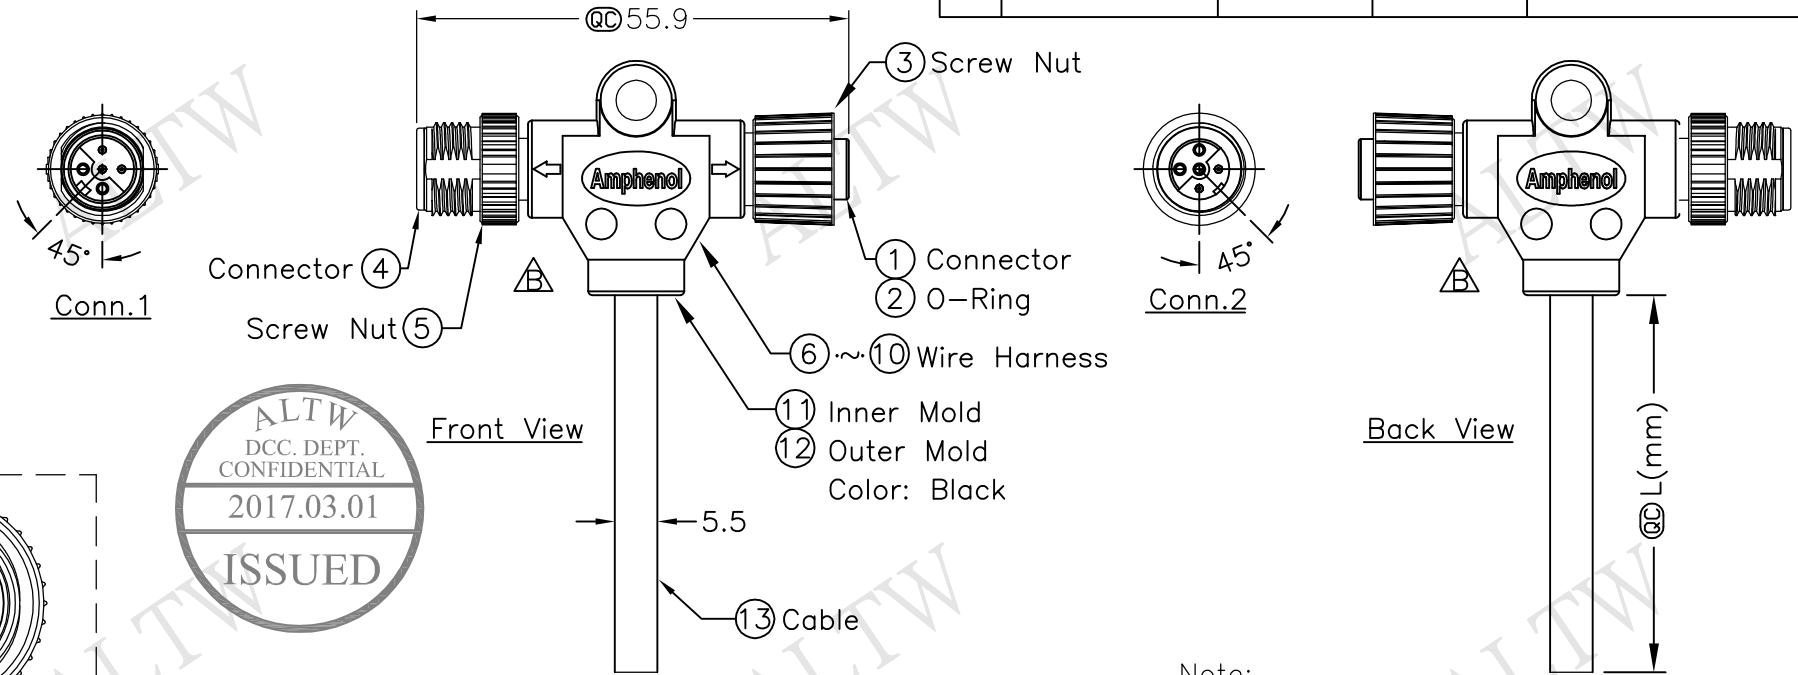

ALTW  
DCC. DEPT.  
CONFIDENTIAL  
2017.03.01  
ISSUED




ALTW  
CONFIDENTIAL  
2017.02.14  
R&D DEPT.

SI-050500-KZ0-TSAXX

XX:01~99Meter  
01:01Meter  
02:02Meters  
:  
:  
99:99Meters

Cable Length(L):01~99Meters

- Note:
- \*  $\text{QC}$  Important Dimension.
  - \* Waterproof Rate: IP67
  - \* Housing: Black, Polyurethane
  - \* Screw Nut: Zinc Alloy, Nickel Plated
  - \* Pin: Copper Alloy, Gold Plated
  - \* O-Ring: Green, Viton
  - \* Wire Harness: UL1007 24AWG,(5Pcs.)
  - \* Cable: Black,UL2464 22AWG\*5C+Talc PVC Jacket UV Resistant OD=5.5mm
  - \* Cable Length Tolerance: 01M:  $\pm 40\text{mm}$   
02M~05M:  $\pm 60\text{mm}$   
06M~10M:  $\pm 100\text{mm}$   
11M~30M:  $\pm 200\text{mm}$   
31M~99M:  $\pm 500\text{mm}$

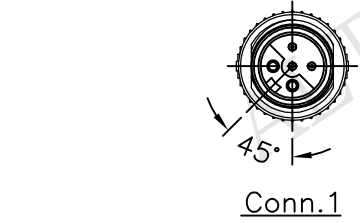

5	Green	綠	5
4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

UNIT:mm	
TOLERANCE	$\pm 0.5 \text{ mm}$

TITLE M12 Conn T Cable Screw MF Conn C Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
$\text{QC}$ : Inspection Item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	SI-050500-KZ0-TSAXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Max

DATE	2017/02/14
DATE	2017/02/14
DATE	2017/02/14