



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN13B0208~11	2013/08/08	Cary	Change Logo From LTW To Amphenol



Conn.

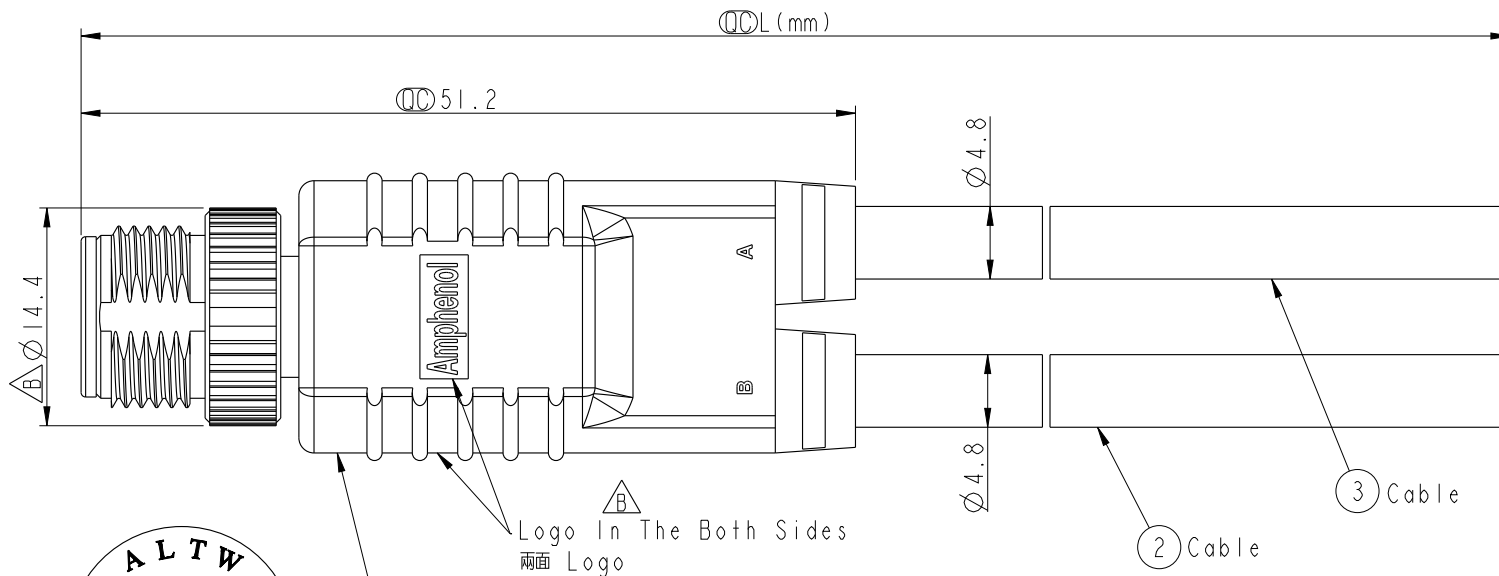

① SS-040000-M00-YS000  
Color: Black


SS-040000-M00-YSBXX

XX:01~99Meter  
01:01Meter  
02:02Meters  
...  
99:99Meters

Cable Length(L):01~99Meters

Note:

- \*  $\varnothing$  Important Dimension To Check.
- \* Waterproof Rate:IP68  
IP68:1M Depth Of Water In 24hours.
- \* Housing:PU,Black
- \* Male Pin:Copper Alloy,Gold Plated.
- \* Cable: 22AWG\*4C+INSULATION  
OD=4.8mm, Black
- \* Cable Length Tolerance:01M:±40mm  
02M~05M:±60mm  
06M~10M:±100mm  
11M~30M:±200mm  
31M~99M:±500mm



Pin Assignments  
Front View

4	Blue 藍	Blue 藍
3	White 白	White 白
2	Black 黑	Black 黑
1	Brown 棕	Brown 棕
	A	B
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5mm

TITLE M12 Cable Screw 4Pin M Conn M Pin			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.2	$\varnothing$ : Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Cary_liu	DATE 2013-08-08
DWG NO SS-040000-M00-YSBXX	CHECKED BY Mafei	DATE 2013-08-08
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013-08-08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.